

Switches and Accessories SUR bridge rectifier



USES

The coil of the DC contactor is powered by AC electricity.

<u>SUR</u> 1	<u>05</u> 2	<u>10</u> 3	<u>-□</u> 4
1	Product type		
2	05:5A		
3			
4	Type of connector for contact: A UT4(4mm); B 6.3Insert spring		

ORDER FORM DESCRIPTION


Note when ordering: When ordering, please note that the product cannot be used in circuits where the starting current exceeds the rated current. Special orders are available upon request.

TECHNICAL PARAMETERS

(Version 1.00)

SAYOON Product Type	SUR
Rated current	5A
Work voltage	12V-380VDC/AC
Input Terminal	Red Red: AC power
Output Terminal (Connecting contactor)	Yellow: positive output, Black: negative power supply
Input line length	320mm
Output line length	150mm
Output interface	UT4 (4mm)
Wire specification	RV-0.3

INSTALLATION DIAGRAM

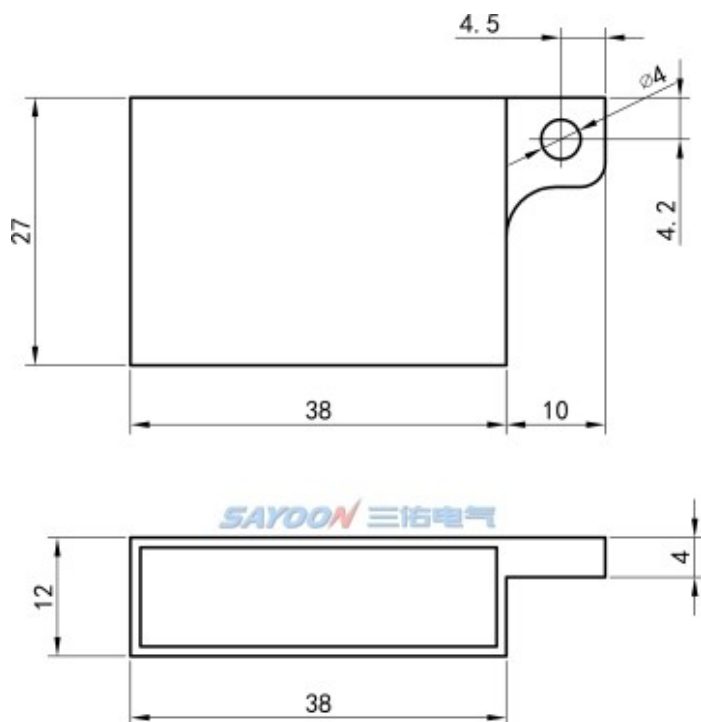

WIRING DIAGRAM

